




# Standard 3 Bänder, 2 oben 1 unten

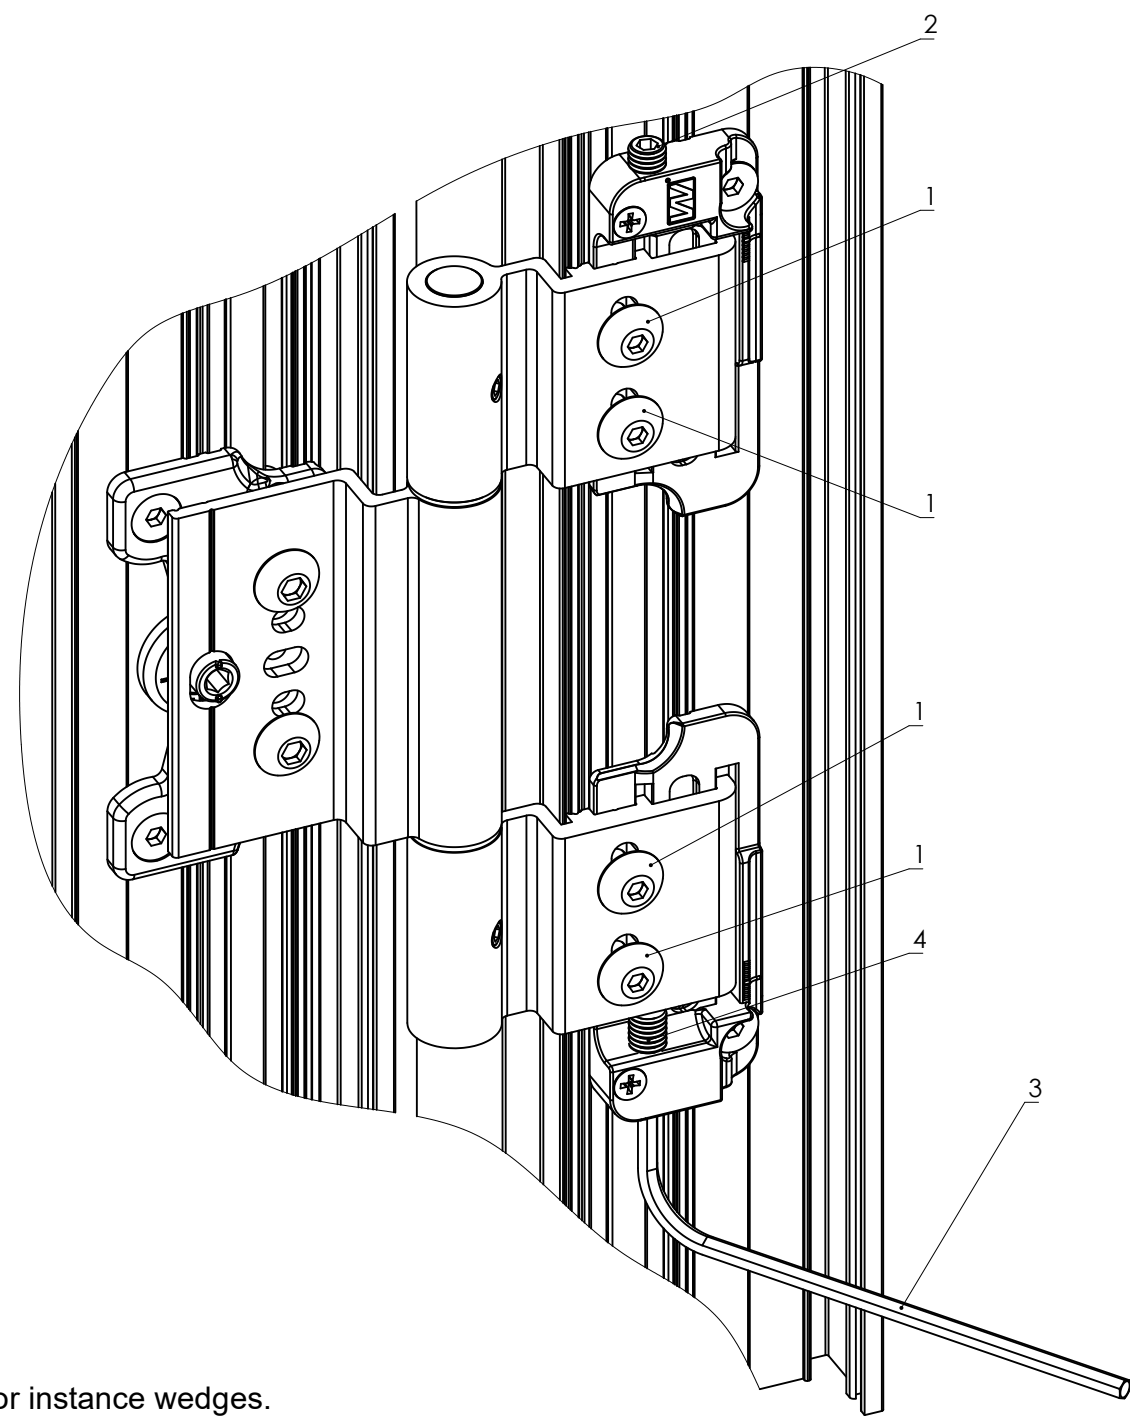

HEIGHT ADJUSTMENT: (regulation range:  $\pm 5\text{mm}$ )

1. Ease up on screws **1** for **every hinge** in door.
2. Unscrew the upper screw **2** for **every hinge** in door.
3. In case of very heavy door, we advise temporarily lighten door with for instance wedges.
4. Use allen wrench **3** to regulate with screw **4**. (one turn 360 degrees will change height by **1,25mm**)  
It should be done for **every hinge** possibly **equal**.
5. After adjustment, screw tight screws **1** in all hinges.

**ROLLER HINGE WR**  
**HEIGHT REGULATION**

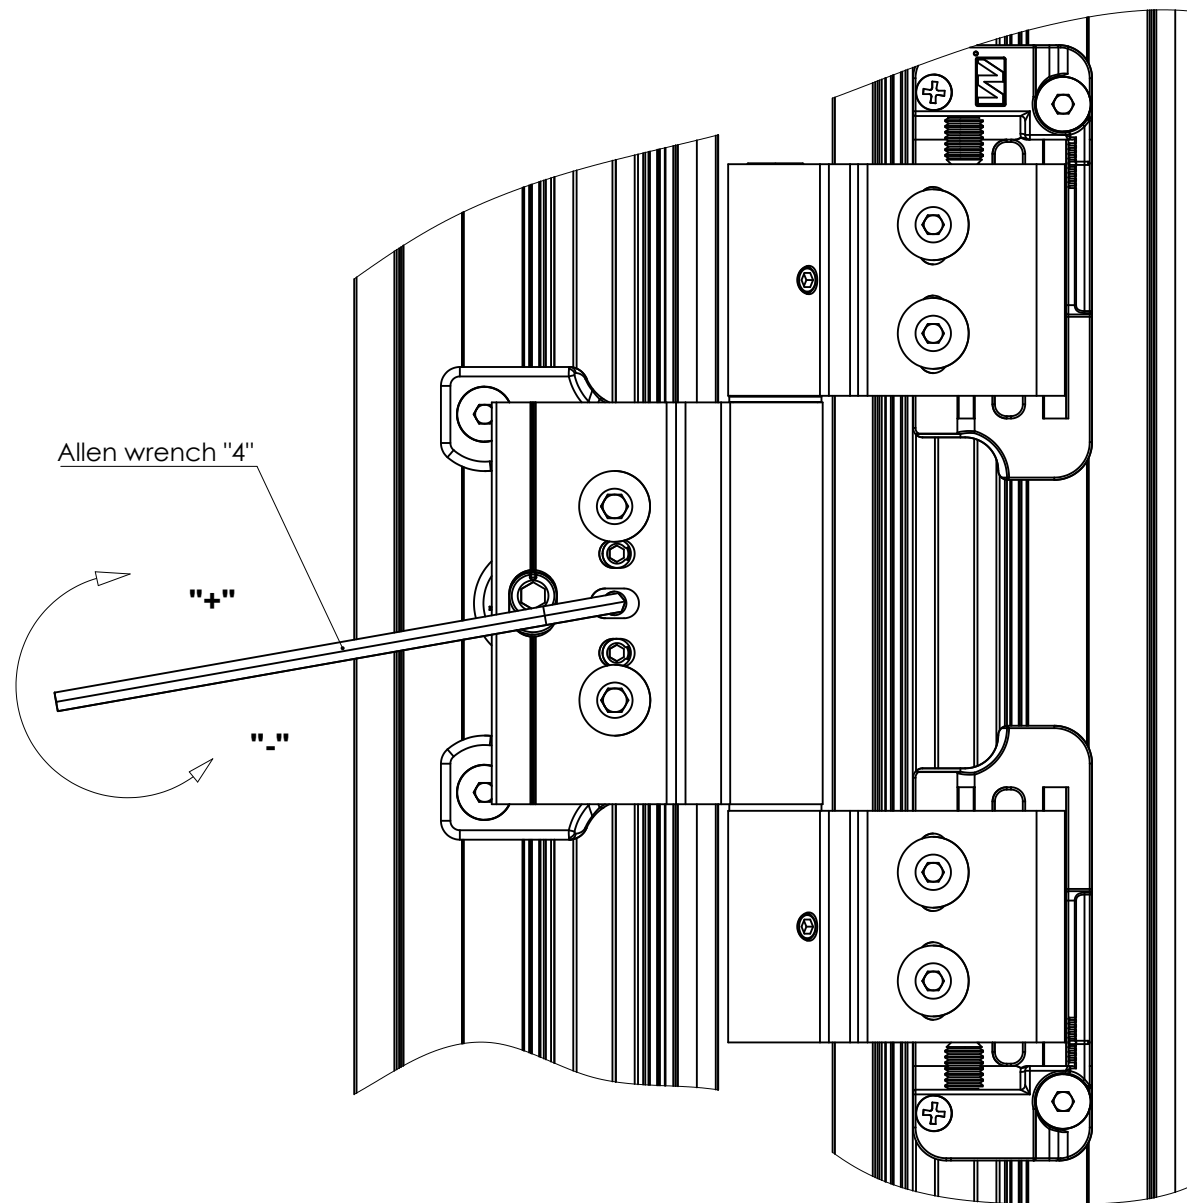
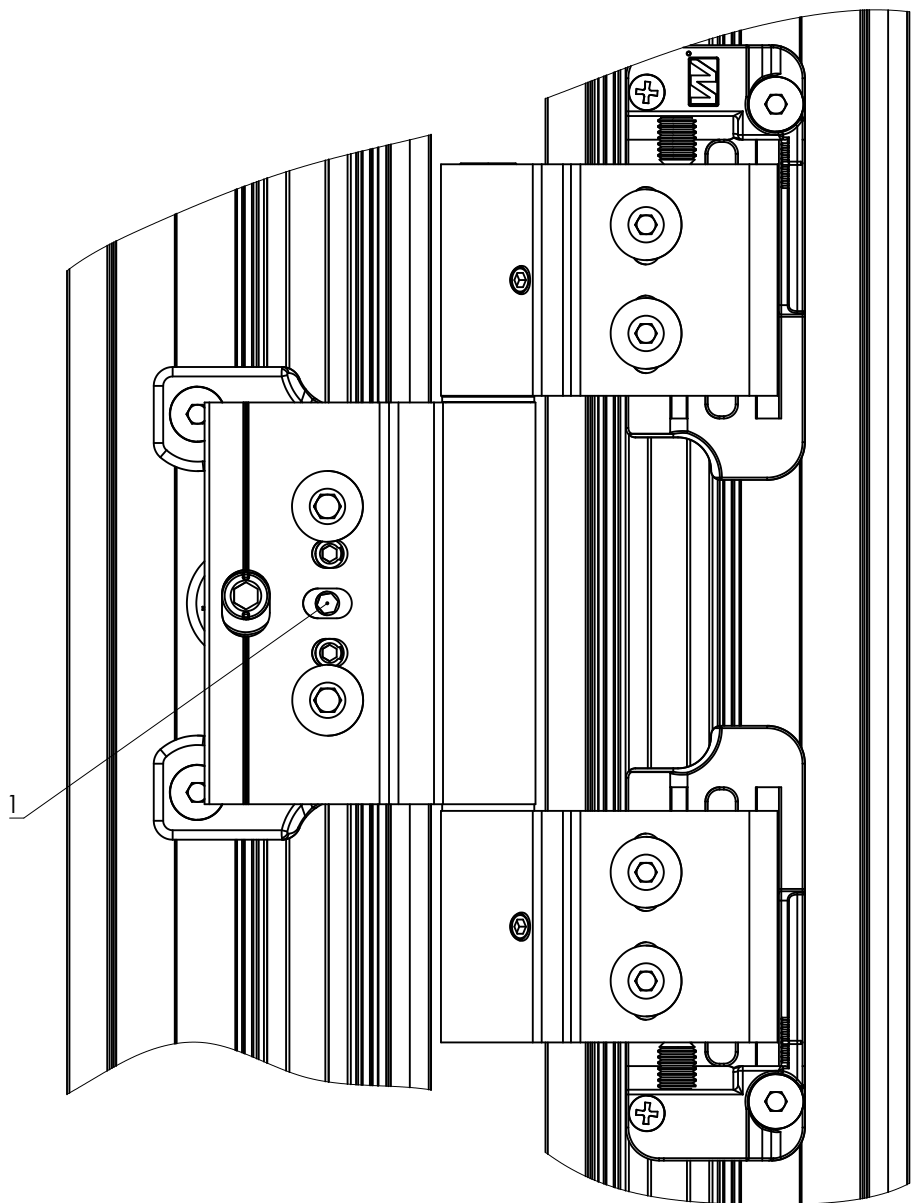


LEFT / RIGHT ADJUSTMENT: (regulation range:  $\pm 2,5\text{mm}^*$ )

1. Use allen wrench to regulate with screw 1. (one turn 360 degrees will change distance by 1,25mm)

\* - for systems with 6mm distance between profiles, for 5mm aluminium systems by virtue of thicknesses of the wing the possible value of the regulation is -1,5mm, +2,5mm

## **ROLLER HINGE WR** **LEFT / RIGHT REGULATION**

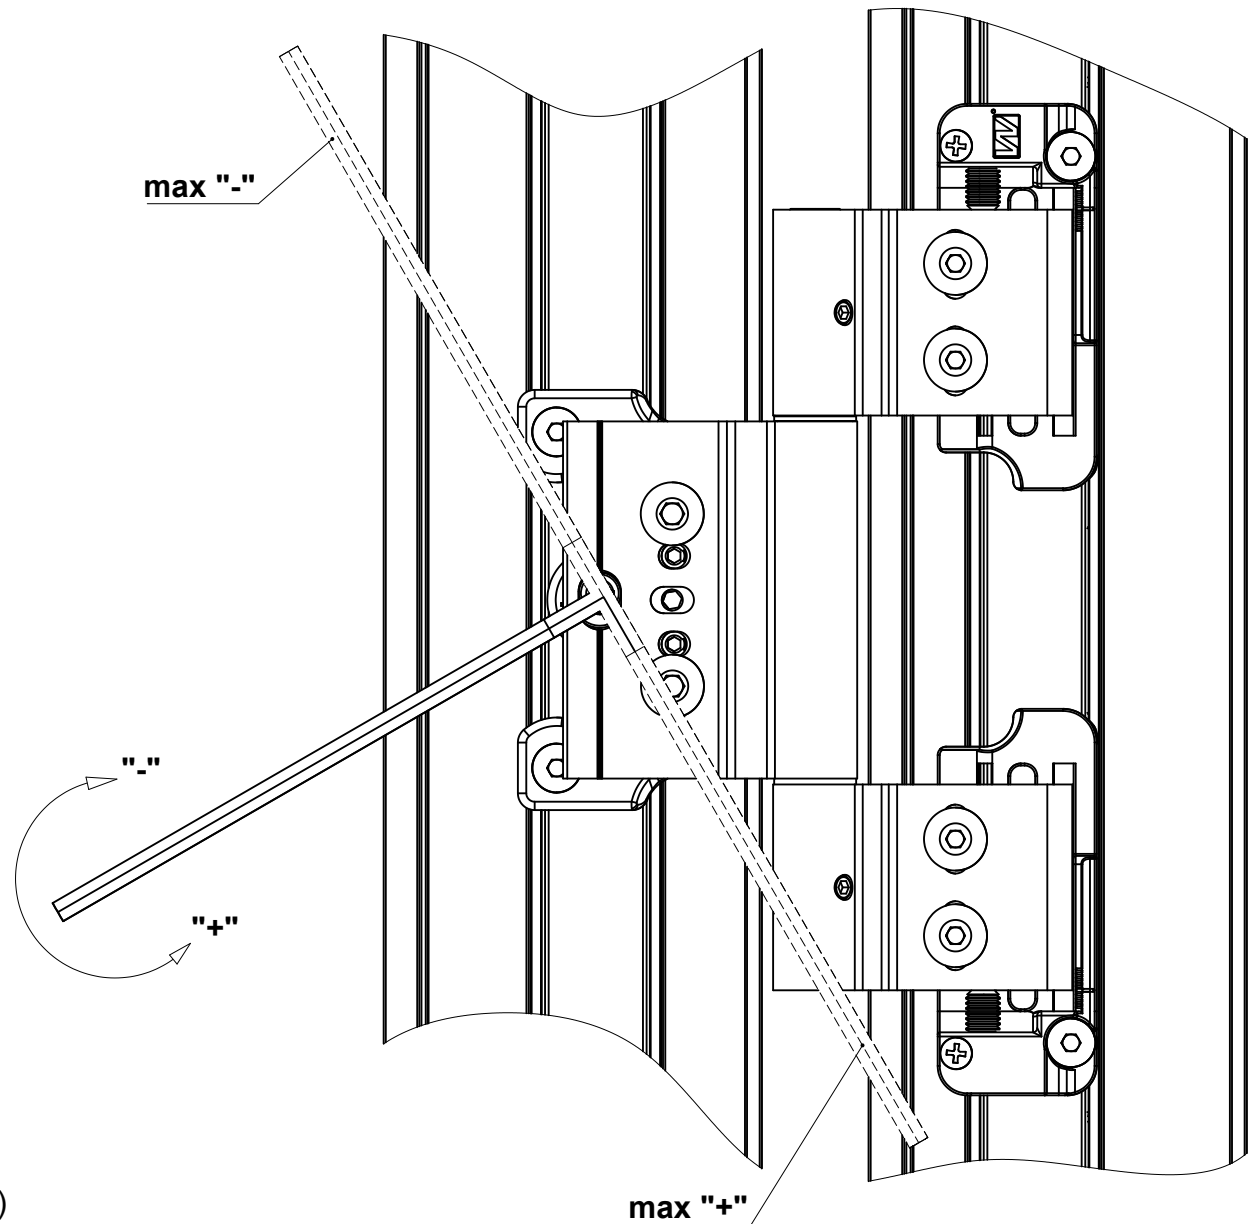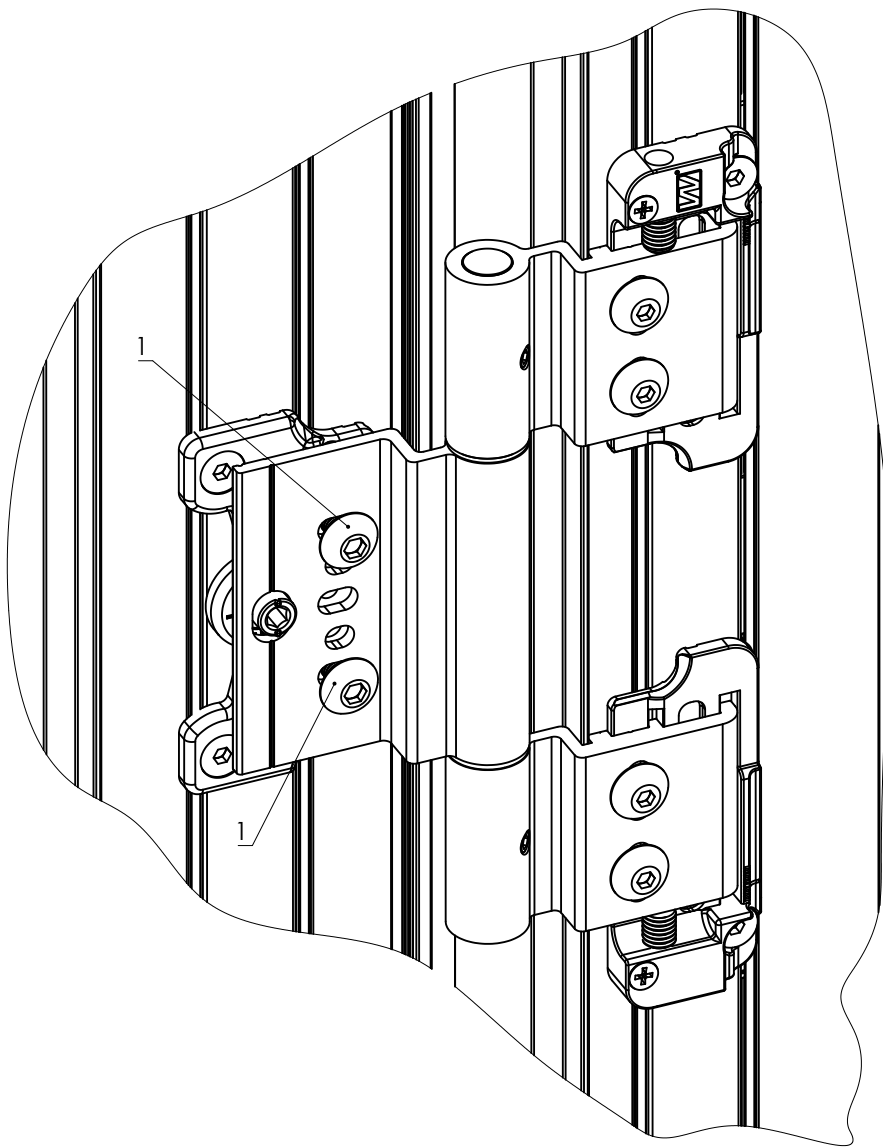

FRONT / BACK ADJUSTMENT: (regulation range up to  $\pm 1,5\text{mm}^*$ )

1. Door before the regulation should lightened.
2. Ease up on screws **1**.
3. Make adjustment by allen wrench "5" with the eccentric. Maximum value can be achieved by 90 turn.
4. After adjustment, screw tight screws **1**.

\* - the real range could be smaller depending on distance near gasket in the aluminium systems

## ROLLER HINGE WR FRONT / BACK REGULATION